


## PRODUCT DESCRIPTION

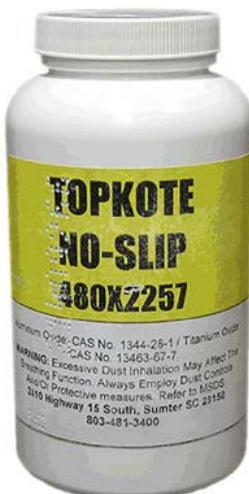

No-Slip is a micro aluminum oxide additive to be used in Topcoat Coatings for slip resistance. We recommend No-Slip in all tubs first for safety and second because it reduces the possibility of getting a call back for dust in the tub bottom.

### Features & Benefits

- Aids in slip resistance
- Easy to use
- Long lasting aluminum oxide

## INSTRUCTIONS

Mix a cap full of No-Slip into a few ounces of mixed glaze (glaze & activator), stir well and roll into the bottom of the tub using a foam roller.

### Limitations:

No-Slip will increase the coefficient of friction on the surface however, because of its micro particle size the coating to which it is added should be considered slip-resistant and not non-skid.

## PHYSICAL PROPERTIES

Composition	Powder
Color	White
Melting Point	2040°C
Storage Temp	-20°C

Rev 01/2026

### TERMS AND CONDITIONS OF SALE

While statements, technical information and recommendations contained herein are based on information our company believes to be reliable, nothing contained herein shall constitute any warranty, express or implied, with respect to the products and/or services described herein and any such warranties are expressly disclaimed. We recommend that the prospective purchaser or user independently determine the suitability of our product(s) for their intended use. No statement, information or recommendation with respect to our products, whether contained herein or otherwise communicated, shall be legally binding upon us unless expressly set forth in a written agreement between us and the purchaser/user.