


Fisheye Eliminator

PRODUCT DESCRIPTION

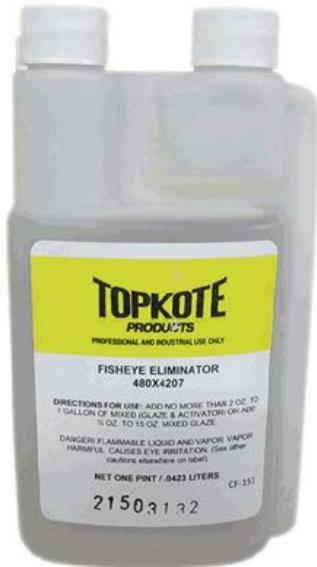

Fisheye Eliminator is a special additive designed to help Topkote urethanes flow out on contaminated surfaces. Using **Fisheye Eliminator** will decrease the possibility of fisheyes by lowering the surface tension of the urethane to which it is added.

Features & Benefits

- Compatible with 280 Low VOC Topcoats
- Decrease fisheyes
- Reduce cratering

INSTRUCTIONS

Substrate should be prepared and primed according to topcoat instructions prior to topcoat application. Add no more than ¼ ounce **Fisheye Eliminator** to 15 ounces mixed material (glaze & activator) or 2 ounces **Fisheye Eliminator** to 1 gallon mixed material (glaze & activator). **DO NOT EXCEED RECOMMENDED AMOUNTS.**

PHYSICAL PROPERTIES

Composition	Paint Additive
Weight	7.32 lb/gal
VOC	6.58 lb/gal
Shelf Life	NA
Flash Point	77° F
Safety Information	For additional information, see SDS

Rev 01/2026

TERMS AND CONDITIONS OF SALE

While statements, technical information and recommendations contained herein are based on information our company believes to be reliable, nothing contained herein shall constitute any warranty, express or implied, with respect to the products and/or services described herein and any such warranties are expressly disclaimed. We recommend that the prospective purchaser or user independently determine the suitability of our product(s) for their intended use. No statement, information or recommendation with respect to our products, whether contained herein or otherwise communicated, shall be legally binding upon us unless expressly set forth in a written agreement between us and the purchaser/user.