




No-Slip 480X2257

PRODUCT DESCRIPTION

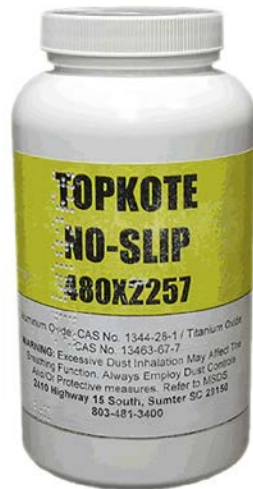

No-Slip is a micro aluminum oxide additive to be used in Topcoat Coatings for slip resistance. We recommend **No-Slip** in all tubs first for safety and second because it reduces the possibility of getting a call back for dust in the tub bottom.

Features & Benefits

- Aids in slip resistance
- Easy to use
- Long lasting aluminum oxide

INSTRUCTIONS

Mix a cap full of No-Slip into a few ounces of mixed glaze (glaze & activator), stir well and roll into the bottom of the tub using a foam roller.

Limitations:

No-Slip will increase the coefficient of friction on the surface however, because of its micro particle size the coating to which it is added should be considered **slip-resistant and not non-skid**.

PHYSICAL PROPERTIES

Composition	Powder
Color	White
Melting Point	2040 °C
Storage Temp	-20°C

See Safety Data Sheet and Labels for additional safety information and handling instructions

The technical data furnished are true and accurate to the best of our knowledge at the date of issuance. It is subject to change without prior notice. It is suggested the user verify with Sumter Coatings, Inc. prior to specifying or ordering. Test results are believed to be reliable; however, no guarantee of accuracy is given or implied. We guarantee all products to conform to Sumter Coatings, Inc.'s quality control standards. Liability, if any, is limited to replacement of product. No other warranty or guarantee of any kind, expressed or implied, is made by Sumter Coatings, Inc., including fitness for a particular purpose.